



easyRock

THE Extra flat compact filter

from 4 to 8 PE

NEW



ECOLOGICAL
No electricity
required



READY TO INSTALL
Extra flat

Sustainable, convenient autonomous sanitation



ECO-FRIENDLY

- ▶ **ZERO ENERGY CONSUMPTION**
Operates without electricity
- ▶ **SILENT**
No noise pollution
- ▶ **LOW ENVIRONMENTAL FOOTPRINT**
- ▶ **MINERAL FILTER MEDIA**
Naturally sourced rock
- ▶ **100% RECYCLABLE MATERIALS)**
- ▶ **RESPECT FOR NATURAL SOIL**
- ▶ **NO VISUAL IMPACT**
Perfectly suits the field



EASY TO INSTALL

- ▶ **EXTRA FLAT FILTER**
Reduced excavation depth
- ▶ **COMPACT**
Small footprint
- ▶ **DELIVERED READY TO INSTALL**
Plug & clean
- ▶ **FLEXIBLE INSTALLATION**
Pack or Line – decision on-site
- ▶ **ADJUSTABLE AND TILTABLE EXTENSIONS**
- ▶ **INNOVATIVE ANCHORING SYSTEM**
Ideal for high groundwater areas
- ▶ **SIMPLIFIED TRANSPORT**
Patented pallet-free system
- ▶ **EASY HANDLING**
Low weight



EASY TO MAINTAIN

- ▶ **ZERO BREAKDOWNS**
No electrical components
- ▶ **LOW MAINTENANCE & RELIABLE**
Peace of mind - guaranteed operation even during prolonged periods of absence
- ▶ **NO PARTS SUBJECT TO WEAR**
- ▶ **LONG-LASTING FILTER MEDIA**
10-year guarantee



easyRock

The compact, eco-friendly filter
that adapts to all your projects



**DURABLE
ECOLOGICAL**



**EXTRA FLAT
READY TO INSTALL**



**RELIABLE
SECURE**



**HIGH-PERFORMANCE
CERTIFIED**



How it works

Simple and efficient
without electricity



STEP 1

The wastewater enters the first treatment compartment, where grease and other floating matter are separated at the surface while solid matter settles.

STEP 2

The pre-treated water then flows into the distribution system (trough and dispersion tray), which optimally feeds the various layers of filter media, including **GRAFRock** mineral media. Depending on the type of terrain, the treated water is discharged by gravity (low outlet) or via an additional lifting station (high outlet). In the case of a high outlet installation with a lifting station, a level alarm is included.

The solution that adapts to all your projects



From 4 to 8 PE
Population
equivalents



Low outlet or
high outlet




Primary or
secondary
residence



Pack or
Line version

easyRock with outflow via gravity

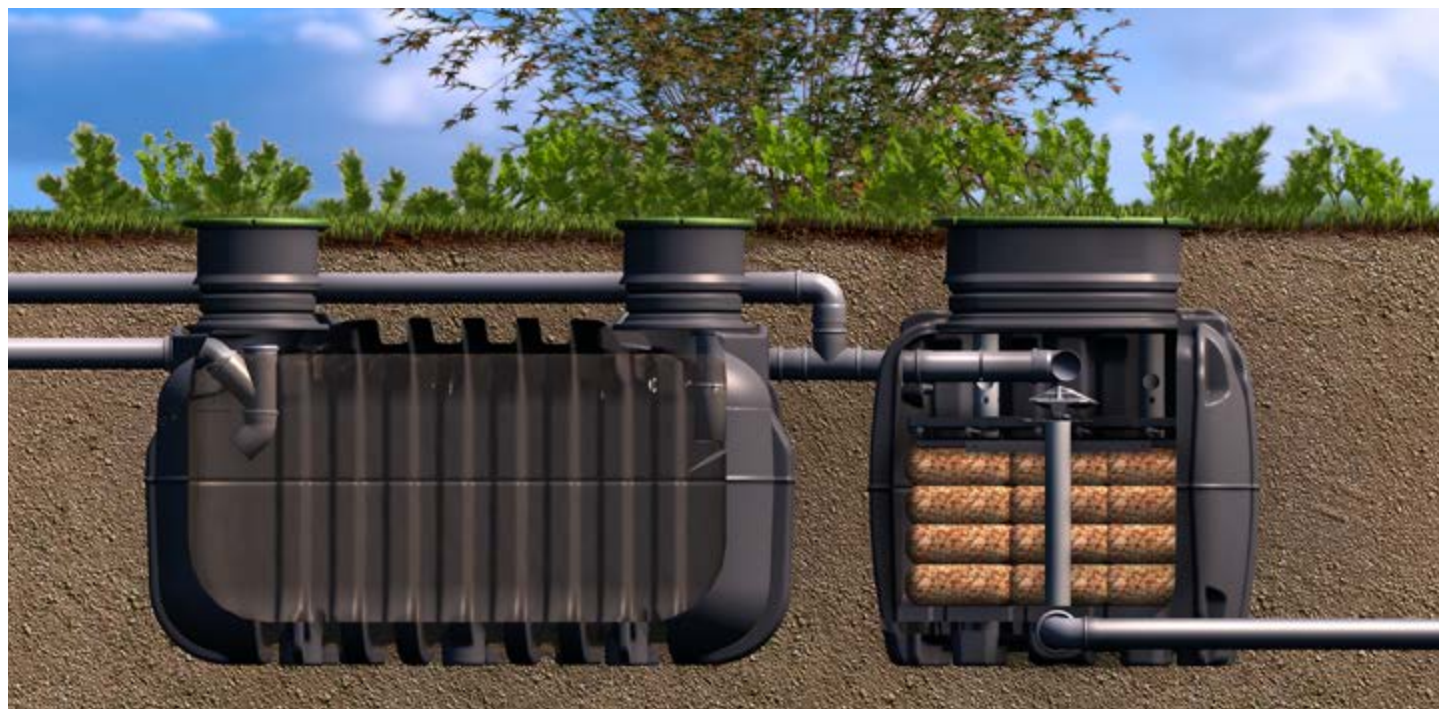

Inhabitants	Volume [l]	Length [mm]	Width [mm]	Height [mm]	Weight [kg]	Order no
4	1.800	2280	2275	1420 – 2120	280	169300
5	2.250	2280	2500	1420 – 2120	300	169301
6	2.700	2280	2725	1420 – 2120	330	169302
8	3.600	2280	3300	1420 – 2120	380	169303

Scope of delivery: Pre-assembled small sewage treatment plant consisting of preliminary treatment with integrated pre-filter and treatment unit with distribution system and **GRAFRock** filter medium, with continuously adjustable telescopic tank domes, covers (2x Ø 400 mm for preliminary treatment and Ø 600/800 mm for the treatment unit).

Accessories



Extension kit easyRock

3 extensions that can be cut to size (2 x Ø 400 mm + 1 x Ø 600/800 mm), usable height: 180 mm; (maximum 3 extension sets possible)

Order no. 169271

Pipe ventilator DN110

electric 220V, optional, if ventilation cannot be implemented according to the installation instructions

Order no. 169138



Ventilation set easyRock

Including PP pipe DN110, Length: 450 mm, to increase the ventilation opening for regions with heavy snowfall

Order no. 169298



Lifting station including alarm

electric 220V, with pre-assembled pump

Order no. 169273



Turbovent deaeration ventilator DN110 – 125

Wind-powered, for vent pipe


Order no. 169131



Buoyancy protection easyRock 4 – 6 EW

4 glass fibre reinforced plastic panels for buoyancy safety, imounting material. Required for Line Version 2x

Order no. 169297

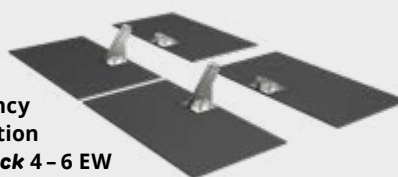

Sampling point 400

Pedestrian loading with plastic cover, child-proof

Order no. 169263



Extension kit easyRock for lifting station

1 extensions that can be cut to size 1 x 300 mm, usable height: 180 mm (maximum 3 extension sets possible)

Order no. 169272



Extension 400, length 600 mm for sampling shaft

Including profile seal; for impementing larger installation depths, usable length: 500 mm, can be shortened to 250 mm

Order no. 330341



GRAF*Rock*

MINERAL FILTER MEDIA

Inspired by nature

The filter media used in GRAF compact systems is made from natural mineral materials derived from volcanic activity.



EXPERTISE

Take advantage of GRAF's 30 years of experience in wastewater management.



LET US SUPPORT YOU IN YOUR PROJECT!

Otto Graf GmbH Kunststoffherzeugnisse
+49(0)76 41 589-0 | export@graf.info | www.graf.info

